


FIT Form


Data

Surface Colour			Blue
Type			Compressible
Thickness	mm		0.95
Number of ply			2
Thickness tolerance	mm		0.03
Hardness	° Shore A		84
Surface Roughness, Rz	µm		2.5
Compressibility at 100 N/cm ²	mm		0.08
	%		8
Paper Release (max.=100) (*)	without ink		90
	with ink		35
Durability test (*)	Gauge loss	%	N/A
	Loss of Compress.	%	N/A
Cylinder Fitness at	4 N/mm	mm	N/A
	5 N/mm	mm	N/A
	6 N/mm	mm	N/A
Flexibility (*)	degree		70
Tensile Strength	N/mm		N/A
2 % Modulus	N/mm		N/A
Elongation at Break	%		N/A
UV Ink Swell test, Thickness Increase in 24 h			0.03
Stickiness	N/25mm		10


Cross Section

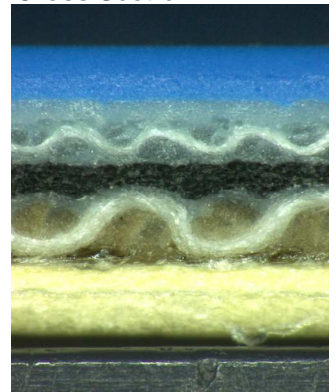


Surface Profile

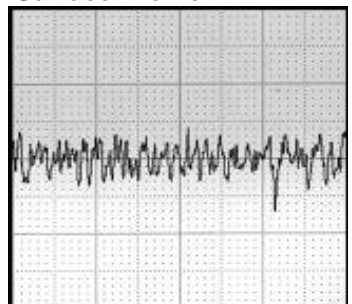

Compressibility Curve

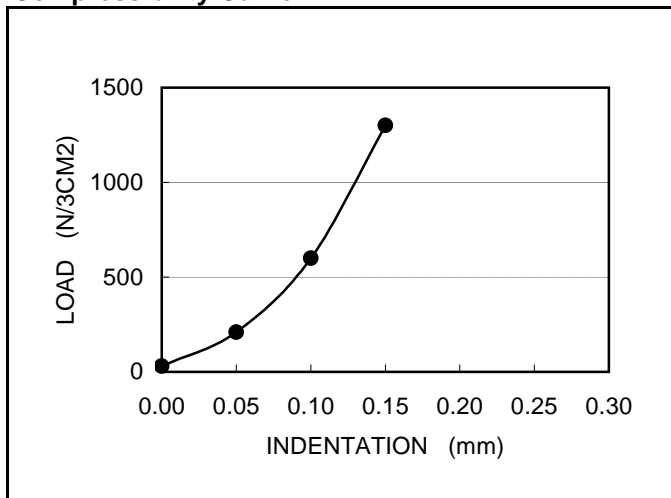

Relation Feeding / Indentation

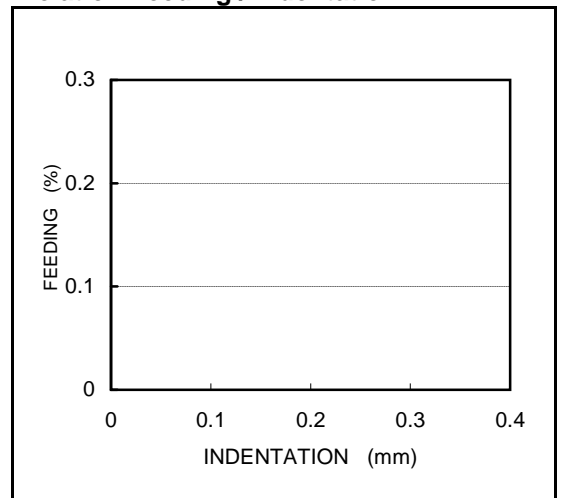

Indentation / mm	0.00	0.05	0.10	0.15	0.20	0.25	0.30
Compressibility N/3cm ²	30	210	600	1300	-	-	-
Feeding	-	-	-	-	-	-	-

Application

Continuous Business Forms
Envelope Printing

Features

Adhesive Type Easy to Wash
Easy Mounting and Removing

(*) Fujikura Testing Method

Fujikura Rubber Ltd.

